



Verde Cable



WENDE GROUP COMPANY CO.,LTD

Factory address : No. 10, Gongye 1st Road, Shangshao Village, Xintang Town, Zengcheng District, Guangzhou City, Guangdong Province, China

WEB : <https://www.verdewire.com>



WENDE GROUP COMPANY CO.,LTD



Verde Group

MAKING THE MOST STABLE TRANSMISSION PRODUCT IN THE WORLD

Verde Intelligent was established in 2007, with its headquarters located in Guangzhou, Guangdong Province, China. The company boasts a modern garden-style factory building covering an area of 12,000 square meters. As a large-scale high-tech enterprise with diversified development, the company primarily engages in the research, development, production, sales, and service of weak current cables, integrated wiring, optical fibers, optical cables, accessories, and other products, falling under the category of production-oriented enterprises. Wende possesses an excellent R&D team as well as marketing and service management teams. The company has independently developed multiple world-leading technologies, holds 90 national patents and proprietary intellectual property rights, and has been recognized as a famous trademark in Guangzhou, China, a recommended brand for safe cities, one of China's top ten weak current cable brands, a contract-abiding and trustworthy enterprise in Guangdong Province, and one of the top 100 enterprises in the security industry. Furthermore, the company has obtained certifications such as CCC, CQC, ISO, and QES.

Factory area

The factory area of 9000m²
Possessing multiple fully automated factory manufacturing lines.

Wende Factory

The company was
established in 2007

Verde Family

The company's staff size is gradually expanding, and the company has introduced more excellent product development personnel, production personnel for smart manufacturing factories, and technical service support teams.

Landmark construction

The company has participated in the construction of multiple landmark projects in China.



Our company has received numerous honorary awards from government departments, including those for integrity enterprise, excellent brand, industry certification, and scientific research patents. Additionally, we have obtained ISO quality system certification, CE certification, SGS certification, and RoHS certification.

Honors and Awards



By facilitating cooperation through professional services, our products are sold worldwide

Sales Exhibition



Adequate inventory can better ensure a faster and more efficient fulfillment of project engineering needs.

Factory warehouse

We are a structured cabling system factory.
primarily engaged in the research, development, production, sales, and technical services of aluminum wires, copper wires, copper threading, wires, and cables.
The factory also provides ODM and OEM services.





荣誉

OUR HONOR

All sectors of society
have expressed their
praise and recognition
towards us

中国电缆产业50强



广东省守合同重信用企业



高新技术企业



中国汽配品牌500强



全国线束十大用户满意品牌



慧聪网名优企业



平安城市建设推荐品牌



第三届理事单位



电线电缆行业协会



国家权威合格产品



AAA企业



信用证书



产品认证培训合格



荣誉



3C国家强制性认证



3C国家强制性认证



3C国家强制性认证



会员证书



营业执照



ISO16949认证



UV认证



UL认证



南方电网入网证



专利证书



ISO14001:2004认证



质量管理体系认证证书



质量管理体系认证证书



商标注册证



广东省著名商标



国标认证书



CONTENTS

01

Electrical Cable

02

Ethernet LAN Cable

03

Fiber Optic Cable

04

Coaxial Cable

05

Speaker Cable


06

Structured Cabling Components

RVS Twisted Pair Electric Cable

RVS Flame Retardant Fire Engineering Control Twisted Pair Cable Wire

Product Overview:

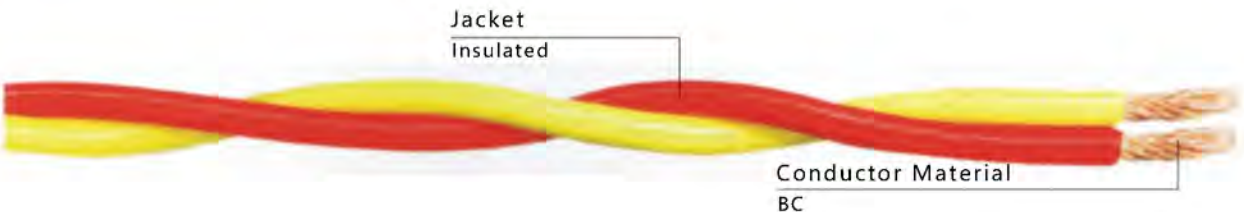

Key attributes:

Type	Low Voltage	Insulation Material	PVC Insulation Cable
Rated voltage	300V / 500V	Sheath materia	Unsheath
Conductor Type	Stranded	Color	Red/ Yellow
Certification	ISO9001/ISO14001/CCC	Conductor	Copper

Packaging and delivery:

Packaging Details	100M/ 320Ft	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	20 X 30 X 20 cm
Single gross weight	5.000 KG		

Lead time:

Quantity (rolls) 1-100	12 days	Quantity (rolls) >100	To be negotiated
Selling Units	Single item	Place of Origin	20 X 30 X 20 cm

OEM & ODM Solutions Tailored :


Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Type/Specifiation	Quantity of Core	Nominal area (mm) ²	Struture of conductor (mm) ²	Overall diameter	Maximum electclal resistance at 20°C Ω/Km	Maximum electclal resistance at 70°C Ω/Km
RVS 2x28/0.15	2	0.5	28/0.15	6.0	39.0	0.012
RVS 2x24/0.2	2	0.75	24/0.2	6.2	26.0	0.011
RVS 2x32/0.2	2	1.0	32/0.2	6.6	19.5	0.010
RVS 2x48/0.2	2	1.5	48/0.2	7.2	13.3	0.010
RVS 2x49/0.25	2	2.5	49/0.25	8.2	7.98	0.009
RVS 2x57/0.3	2	4.0	57/0.3	9.2	4.95	0.007
RVS 2x85/0.3	2	6.0	85/0.3	10.3	3.39	0.006

RVVP Flexible Shielded PVC Insulation Cable

RVVP Insulated Wire Oxygen-free Bare Copper Wire Flexible Shielded Cable

Product Overview:

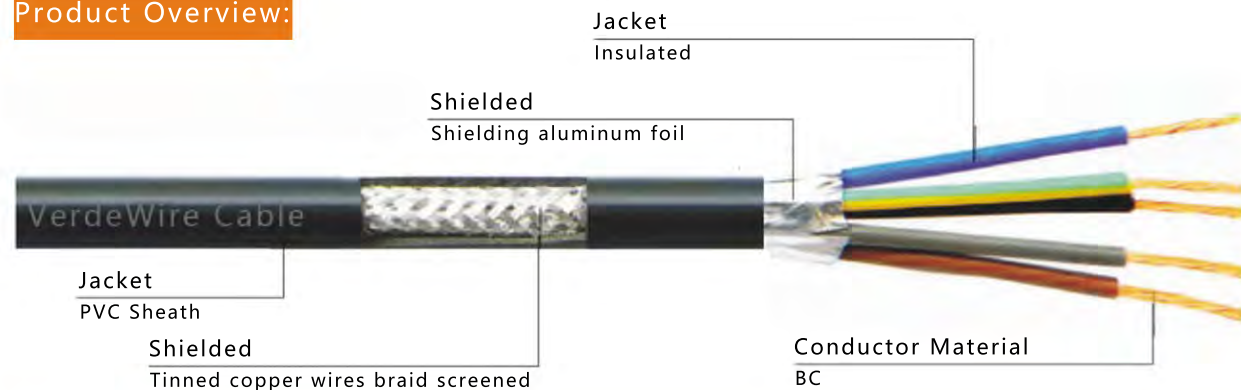

Key attributes:

Type	Low Voltage	Insulation Material	PVC Insulation Cable
Rated voltage	300/500V	Conductor	Flexible pure Copper
Conductor Type	Stranded	Color	Black/ White
Certification	ISO9001/ISO14001/CCC	Standard	IEC / UL / As customer's request
Length	320Ft / 100Meter	Jacket	PVC
Core	1\2\3\4\5\6\7 core		

Packaging and delivery:

Packaging Details	100M/ 320Ft	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	45 X 45 X 20 cm
Single gross weight	20.000 KG		

Lead time:

Quantity (rolls) 1-3000	12 days	Quantity (rolls) >3000	To be negotiated
Selling Units	Single item	Place of Origin	45 X 45 X 20 cm

OEM & ODM Solutions Tailored :

Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.


Type/Specifiation	Quantity of Core	Nominal area (mm) ²	Struture of conductor (mm) ²	Referential value of braid > %	Overall diameter		Maximum electrical resistance at 20°C Ω/Km	Maximum electrical resistance at 70°C Ω/Km
					Lower linmit	Upper linmit		
RVVP2X7/0.12	2	0.08	7/0.15	80	3.2	4.2	247	0.018
RVVP2X7/0.15	2	0.12	7/0.15	80	3.7	4.9	158	0.016

Type/Specifiation	Quantity of Core	Nominal area (mm) ²	Struture of conductor (mm) ²	Referential value of braid > %	Overall diameter		Maximum electrical resistance at 20°C Ω/Km	Maximum electrical resistance at 70°C Ω/Km
					Lower linmit	Upper linmit		
RVVP2X12/0.15	2	0.2	12/0.15	80	4.1	5.3	92.3	0.013
RVVP2X16/0.15	2	0.3	16/0.15	80	4.8	6.2	69.2	0.014
RVVP2X28/0.15	2	0.5	28/0.15	80	5.3	6.8	39.0	0.012
RVVP2X24/0.2	2	0.75	24/0.2	80	5.8	7.4	26.0	0.010
RVVP2X32/0.2	2	1.0	32/0.2	80	6.4	8.2	19.5	0.010
RVVP2X48/0.2	2	1.5	48/0.2	80	7.3	9.2	13.3	0.009
RVVP3X7/0.15	3	0.12	7/0.15	80	3.9	5.1	158	0.016
RVVP3X12/0.15	3	0.2	12/0.15	80	4.5	5.8	92.3	0.013
RVVP3X16/0.15	3	0.3	16/0.15	80	5.1	6.5	69.2	0.014
RVVP3X28/0.15	3	0.5	28/0.15	80	5.6	7.1	39.0	0.012
RVVP3X24/0.2	3	0.75	24/0.2	80	6.1	7.8	26.0	0.010
RVVP3X32/0.2	3	1.0	32/0.2	80	7.2	9.1	19.5	0.010
RVVP3X48/0.2	3	1.5	48/0.2	80	8.0	10.0	13.3	0.009
RVVP4X7/0.15	4	0.12	7/0.15	80	4.5	5.8	158	0.016
RVVP4X12/0.15	4	0.2	12/0.15	80	4.9	6.2	92.3	0.013
RVVP4X16/0.15	4	0.3	16/0.15	80	5.5	7.0	69.2	0.014
RVVP5X7/0.15	5	0.12	7/0.15	80	4.8	6.2	158	0.016
RVVP5X12/0.15	5	0.2	12/0.15	80	5.3	6.7	92.3	0.013
RVVP5X16/0.15	5	0.3	16/0.15	80	6.0	7.6	69.2	0.014
RVVP6X7/0.15	6	0.12	7/0.15	80	5.2	6.6	158	0.016
RVVP6X12/0.15	6	0.2	12/0.15	80	5.7	7.2	92.3	0.013
RVVP6X16/0.15	6	0.3	16/0.15	80	6.5	8.2	69.2	0.014
RVVP7X7/0.15	7	0.12	7/0.15	80	5.2	6.6	158	0.016
RVVP7X12/0.15	7	0.2	12/0.15	80	5.7	7.2	92.3	0.013
RVVP7X16/0.15	7	0.3	16/0.5	80	6.5	8.2	69.2	0.014
RVVP10X7/0.15	10	0.12	7/0.15	80	6.4	8.1	158	0.016
RVVP10x12/0.15	10	0.2	12/0.15	80	7.4	9.3	92.3	0.13
RVVP10X16/0.15	10	0.3	16/0.15	80	8.7	10.9	69.2	0.14
RVVP12X7/0.15	12	0.12	7/0.15	80	6.6	8.3	158	0.016
RVVP12X12/0.15	12	0.2	12/0.15	80	7.6	9.6	92.3	0.013
RVVP12X16/0.15	12	0.3	16/0.15	80	9.0	11.2	69.2	0.014
RVVP6X28/0.15	6	0.5	28/0.15	80	7.0	9.0	39.0	0.012
RVVP6X24/0.2	6	0.75	24/0.2	80	7.6	9.6	26.0	0.010
RVVP6X32/0.2	6	1.0	32/0.2	80	9.0	11.1	19.5	0.010
RVVP6X48/0.2	6	1.5	48/0.2	80	10.5	12.5	13.3	0.009
RVVP7X28/0.15	7	0.5	28/0.2	80	7.3	9.3	39.0	0.012
RVVP2X7X0.75	8	0.75	24/0.2	80	1.0	12.0	26.0	0.010

RVV Flexible pure Copper PVC Insulation Cable

RVV Insulated Wire Oxygen-free Bare Copper Wire Flexible Cable

Product Overview:

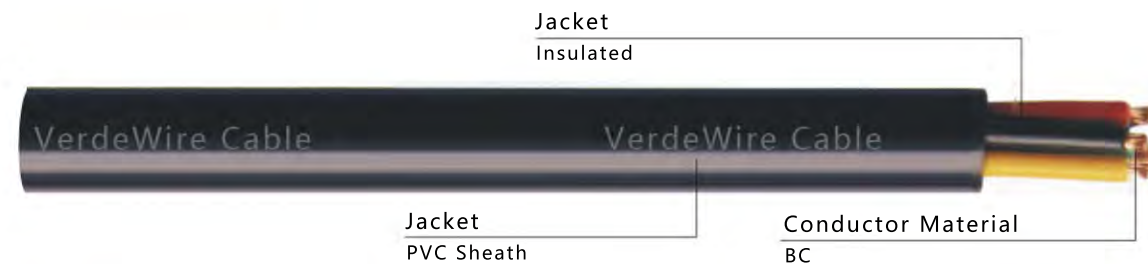

Key attributes:

Type	Low Voltage	Insulation Material	PVC Insulation Cable
Rated voltage	300/500V	Conductor	Flexible pure Copper
Conductor Type	Stranded	Color	Black/ White
Certification	ISO9001/ISO14001/CCC	Standard	IEC / UL / As customer's request
Length	320Ft / 100Meter	Jacket	PVC
Core	1\2\3\4\5\6\7 core		

Packaging and delivery:

Packaging Details	100M/ 320Ft	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	45 X 45 X 20 cm
Single gross weight	20.000 KG		

Lead time:

Quantity (rolls) 1-3000	12 days	Quantity (rolls) >3000	To be negotiated
Selling Units	Single item	Place of Origin	45 X 45 X 20 cm

OEM & ODM Solutions Tailored :

Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Type/Specifiation	Quantity of Core	Nominal area (mm) ²	Struture of conductor (mm) ²	Overall diameter		Maximum eletrtical resistance at 20°C Ω/Km	Maximum eletrtical resistance at 70°C Ω/Km
				Lower linmit	Upper linmit		
RVV 2X28/0.15	2	0.5	28/015	4.6	5.9	39.0	0.012
RVV 2X24/0.2	2	0.75	24/0.2	5.7	7.2	26.0	0.011
RVV 2X32/0.2	2	1.0	32/0.2	5.9	7.5	19.5	0.010

RVV 2X48/0.2	2	1.5	48/0.2	6.8	8.6	13.3	0.010
RVV 2X49/0.25	2	2.5	49/0.25	8.4	10.6	7.98	0.009
RVV 3X24/0.2	3	0.75	24/0.2	6.0	7.6	26.0	0.011
RVV 3X32/0.2	3	1.0	32/0.2	6.3	8.0	19.5	0.010
RVV 3X48/0.2	3	1.5	48/0.2	7.4	9.4	13.3	0.010
RVV 3X49/0.25	3	2.5	49/2.25	9.2	11.4	7.98	0.009
RVV 4X24/0.2	4	0.75	24/0.2	6.6	8.3	26.0	0.011
RVV 4X32/0.2	4	1.0	32/0.2	7.1	9.0	19.5	0.010
RVV 4X48/0.2	4	1.5	48/0.2	8.4	10.5	13.3	0.010
RVV 4X49/0.25	4	2.5	49/0.25	10.1	12.5	7.98	0.009

产品执行标准:GB/T 5023.5-2008,CNCA-01C-002:2007)

Implemented product standard:
GB/T 5023.5-2008&CNCA-01C-002:2007

Type/Specifiation	Quantity of Core	Nominal area (mm) ²	Struture of conductor (mm) ²	Overall diameter		Maximum eletrtical resistance at 20°C Ω/Km	Maximum eletrtical resistance at 70°C Ω/Km
				Lower linmit	Upper linmit		
RVV6X24/0.2	6	0.75	24/0.2	6.5	9.4	26.0	0.010
RVV8X24/0.2	8	0.75	24/0.2	7.5	10.4	26.0	0.010
RVV10X24/0.2	10	0.75	24/0.2	9.0	11.7	26.0	0.010
RVV12X24/0.2	12	0.75	24/0.2	9.5	12.4	26.0	0.010
RVV4X28/0.15	4	0.5	28/0.15	5.2	7.2	39.0	0.012
RVV5X28/0.15	5	0.5	28/0.15	5.8	7.8	39.0	0.012
RVV6X28/0.15	6	0.5	28/0.15	6.7	8.7	39.0	0.012
RVV7X28/0.15	7	0.5	28/0.15	7.0	9.0	39.0	0.012
RVV8X28/0.15	8	0.5	28/0.15	7.6	9.6	39.0	0.012
RVV 2X81/0.25	2	4.0	81/0.25	10.0	12.4	4.95	0.007
RVV 2X122/0.25	2	6.0	122/0.25	12.0	14.5	3.30	0.006
RVV 3X81/0.25	2	4.0	81/0.25	10.8	13.5	4.95	0.007
RVV 3X122/0.25	3	6.0	122/0.25	13.2	15.5	3.30	0.006
RVV 4X81/0.25	3	4.0	81/0.25	11.8	14.6	4.95	0.007
RVV 4X122/0.25	4	6.0	122/0.25	15.2	17.0	3.30	0.006
RVV 5X81/0.25	4	4.0	81/0.25	13.3	16.5	4.95	0.007
RVV 5X122/0.25	5	6.0	122/0.25	16.5	18.5	3.30	0.006
RVV 6X24/0.2	6	0.75	24/0.2	7.9	9.9	26.0	0.011
RVV 6X48/0.2	6	1.5	48/0.2	10.3	12.3	13.3	0.010
RVV 6X49/0.2	6	2.5	49/0.25	13.0	15.0	7.98	0.009
RVV 8X24/0.25	8	0.75	24/0.2	9.0	11.0	26.0	0.011
RVV 8X32/0.2	8	1.0	32/0.2	9.2	11.2	19.5	0.010
RVV 8X48/0.25	8	1.5	48/0.2	11.5	13.5	13.3	0.010

CONTENTS

01

Electrical Cable

02

Ethernet LAN Cable

03

Fiber Optic Cable

04

Coaxial Cable

05

Speaker Cable


06

Structured Cabling Components

Cat5e UTP Lan Cable

Ethernet Network Cat5e,UTP,RJ45,305m,26AWG

Product Overview:

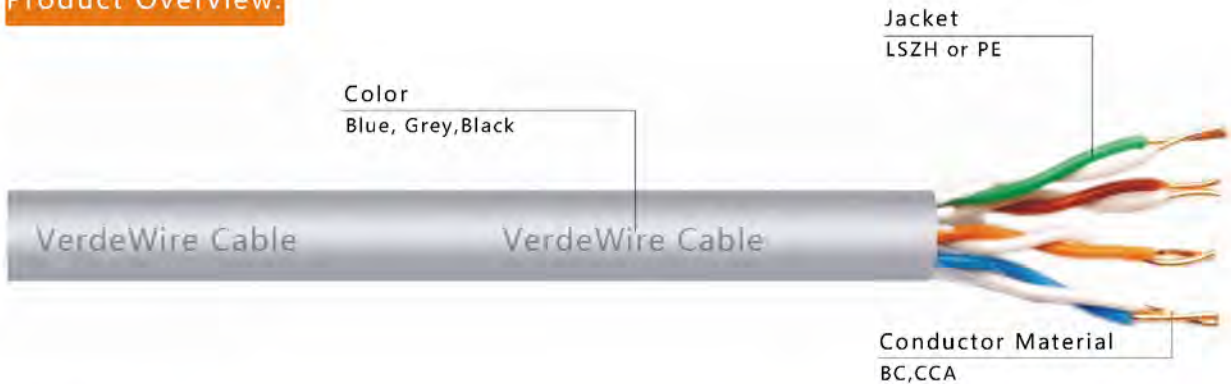

Key attributes:

Type	Cat 5e	Conductor Material	0.45mm 26AWG
Number of Conductors	8	Place of Origin	GuangZhou, China
Certification	ISO9001 / FCC / ROHS / CE	Color	Blue / Grey / Black
Wight	About 12KGS / Box	Conductor Material	BC / CCA
Length	1000Ft / 305Meter	Jacket Material	LSZH / PE
Shield	UTP		

Packaging and delivery:

Packaging Details	305M/ 1000Ft	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	35.5 X 35.5 X 23 cm
Single gross weight	12.000 KG		

Lead time:

Quantity (rolls) 1-3000	12 days	Quantity (rolls) >3000	To be negotiated
Selling Units	Single item	Place of Origin	35.5 X 35.5 X 23 cm

OEM & ODM Solutions Tailored :


Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Model Number	Type	Diameter	Conductor	Shield	Jacket	Length
Cat5e-UTP-BC0.45	Cat5e UTP Lan Cable	0.45mm	BC	UTP	PE	1000Ft / 305Meter
Cat5e-UTP-BC0.48	Cat5e UTP Lan Cable	0.48mm	BC	UTP	PE	1000Ft / 305Meter
Cat5e-UTP-CCA0.45	Cat5e UTP Lan Cable	0.45mm	CCA	UTP	PE	1000Ft / 305Meter
Cat5e-UTP-CCA0.48	Cat5e UTP Lan Cable	0.48mm	CCA	UTP	PE	1000Ft / 305Meter

Cat5e FTP Lan Cable

Ethernet Network Cat5e,FTP,RJ45,305m,26AWG

Product Overview:

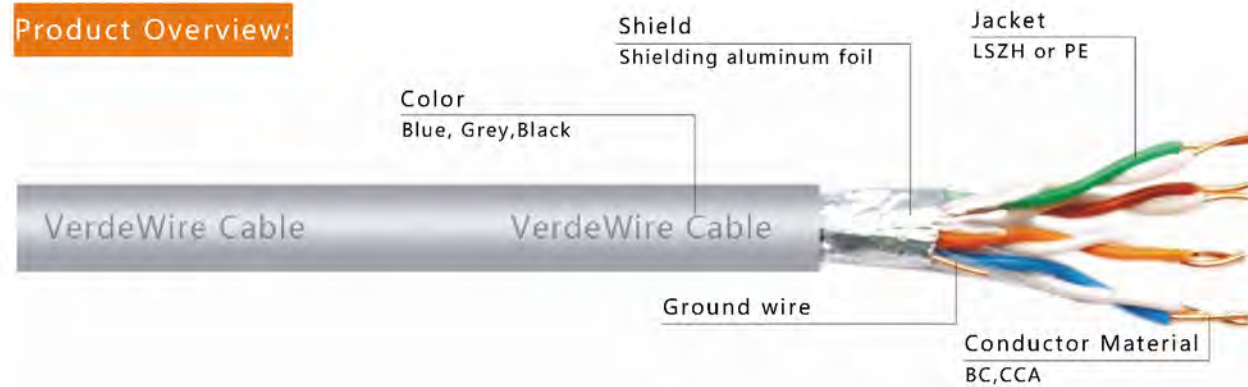

Key attributes:

Type	Cat 5e	Conductor Material	0.45mm 26AWG
Number of Conductors	8	Place of Origin	GuangZhou, China
Certification	ISO9001 / FCC / ROHS / CE	Color	Blue / Grey / Black
Wight	About 12KGS / Box	Conductor Material	BC / CCA
Length	1000Ft / 305Meter	Jacket Material	LSZH / PE
Shield	STP/ FTP		

Packaging and delivery:

Packaging Details	305M/ 1000Ft	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	35.5 X 35.5 X 23 cm
Single gross weight	12.000 KG		

Lead time:

Quantity (rolls) 1-3000	12 days	Quantity (rolls) >3000	To be negotiated
Selling Units	Single item	Place of Origin	35.5 X 35.5 X 23 cm

OEM & ODM Solutions Tailored :


Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Model Number	Type	Diameter	Conductor	Shield	Jacket	Length
Cat5e-UTP-CU0.45	Cat5e FTP NETWORK CABLE	0.45mm	BC	FTP	PE	1000Ft / 305Meter
Cat5e-UTP-CCA0.48	Cat5e FTP NETWORK CABLE	0.48mm	BC	FTP	PE	1000Ft / 305Meter
Cat5e-FTP-CCA0.45	Cat5e STP NETWORK CABLE	0.45mm	CCA	STP	PE	1000Ft / 305Meter
Cat5e-STP-CCA0.48	Cat5e STP NETWORK CABLE	0.48mm	CCA	STP	PE	1000Ft / 305Meter

Cat6 FTP Lan Cable

Ethernet Network Cat6,FTP,RJ45,305m,24AWG

Product Overview:

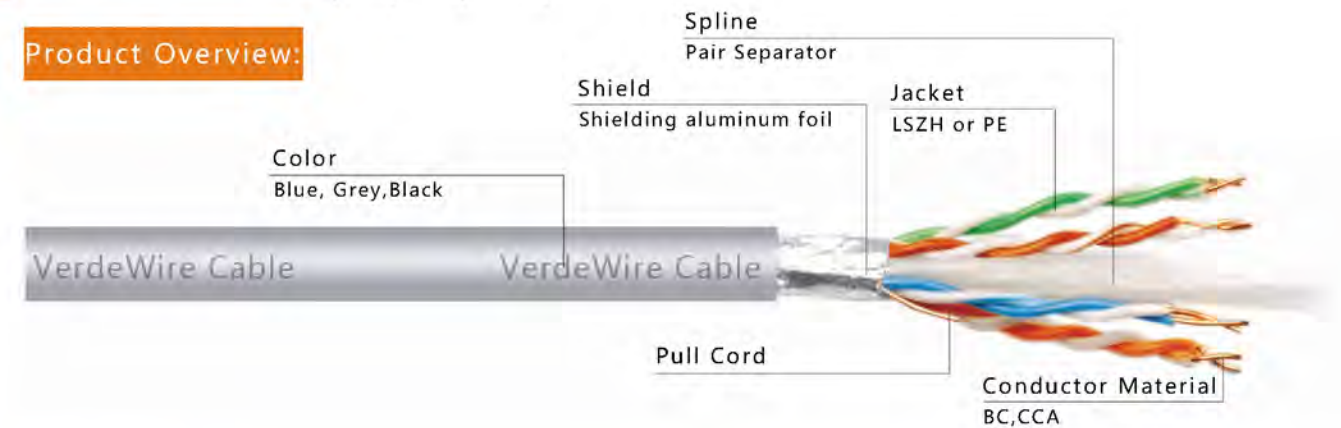

Key attributes:

Type	Cat 6	Conductor Material	0.51mm 24AWG
Number of Conductors	8	Place of Origin	GuangZhou, China
Certification	ISO9001 / FCC / ROHS / CE	Color	Blue / Grey / Black
Wight	About 13.8KGS / Box	Conductor Material	BC / CCA
Length	1000Ft / 305Meter	Jacket Material	LSZH / PE
Shield	STP/ FTP		

Packaging and delivery:

Packaging Details	305M/ 1000Ft	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	40 X 40 X 23 cm
Single gross weight	13.8.000 KG		

Lead time:

Quantity (rolls) 1-3000	12 days	Quantity (rolls) >3000	To be negotiated
Selling Units	Single item	Place of Origin	40 X 40 X 23 cm

OEM & ODM Solutions Tailored :


Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Model Number	Type	Diameter	Conductor	Shield	Jacket	Length
Cat6-FTP-BC0.51	Cat6 FTP NETWORK CABLE	0.51mm	BC	FTP/STP	PE	1000Ft / 305Meter
Cat6-FTP-CCA0.51	Cat6 FTP NETWORK CABLE	0.51mm	CCA	FTP/STP	PE	1000Ft / 305Meter
Cat6-STP-BC0.51	Cat6 STP NETWORK CABLE	0.51mm	BC	FTP/STP	PE	1000Ft / 305Meter
Cat6-STP-CCA0.51	Cat6 STP NETWORK CABLE	0.51mm	CCA	FTP/STP	PE	1000Ft / 305Meter

Cat6 UTP Lan Cable

Ethernet Network Cat6,UTP,RJ45,305m,24AWG

Product Overview:

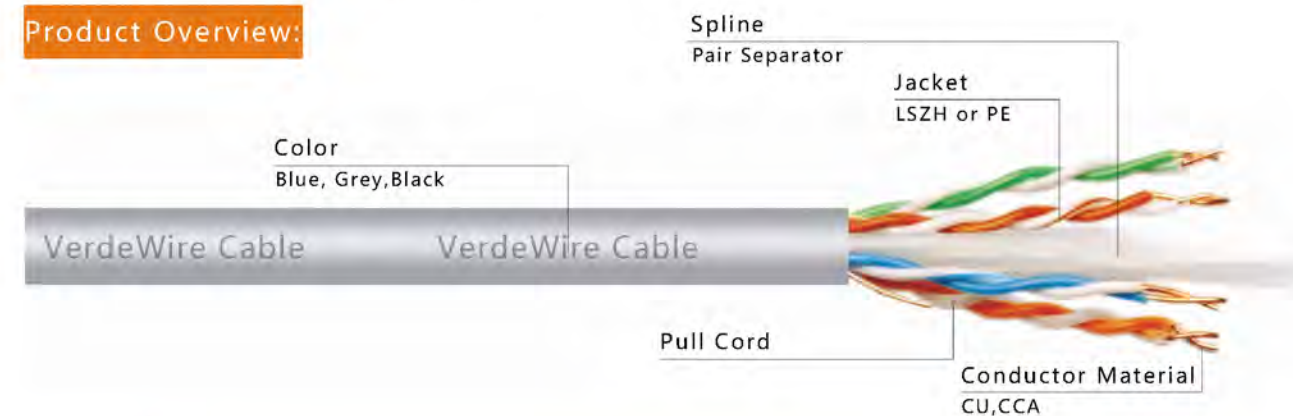

Key attributes:

Type	Cat 6	Conductor Material	0.51mm 24AWG
Number of Conductors	8	Place of Origin	GuangZhou, China
Certification	ISO9001 / FCC / ROHS / CE	Color	Blue / Grey / Black
Wight	About 13.8KGS / Box	Conductor Material	CU / CCA
Length	1000Ft / 305Meter	Jacket Material	LSZH / PE
Shield	UTP		

Packaging and delivery:

Packaging Details	305M/ 1000Ft	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	40 X 40 X 23 cm
Single gross weight	13.8.000 KG		

Lead time:

Quantity (rolls) 1-3000	12 days	Quantity (rolls) >3000	To be negotiated
Selling Units	Single item	Place of Origin	40 X 40 X 23 cm

OEM & ODM Solutions Tailored :

Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Model Number	Type	Diameter	Conductor	Shield	Jacket	Length
Cat6-UTP-BC0.51	Cat6 UTP Lan Cable	0.51mm	BC	UTP	PE	1000Ft / 305Meter
Cat6-UTP-BC0.57	Cat6 UTP Lan Cable	0.57mm	BC	UTP	PE	1000Ft / 305Meter
Cat6-UTP-CCA0.51	Cat6 UTP Lan Cable	0.51mm	CCA	UTP	PE	1000Ft / 305Meter
Cat6-UTP-CCA0.57	Cat6 UTP Lan Cable	0.57mm	CCA	UTP	PE	1000Ft / 305Meter

Cat6 UTP Outdoor Lan Cable

Ethernet Outdoor Cat6,UTP,RJ45,305m,24AWG

Product Overview:



Key attributes:

Type	Outdoor Cat 6	Conductor Material	0.51mm 24AWG
Number of Conductors	8	Place of Origin	GuangZhou, China
Certification	ISO9001 / FCC / ROHS / CE	Color	Blue / Grey / Black
Wight	About 13.8KGS / Box	Conductor Material	CU / CCA
Length	1000Ft / 305Meter	Jacket Material	LSZH / PE
Shield	UTP/ STP/ FTP		

Packaging and delivery:

Packaging Details	305M/ 1000Ft	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	40 X 40 X 23 cm
Single gross weight	13.8.000 KG		

Lead time:

Quantity (rolls) 1-3000	12 days	Quantity (rolls) >3000	To be negotiated
Selling Units	Single item	Place of Origin	40 X 40 X 23 cm

OEM & ODM Solutions Tailored :

Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Model Number	Type	Diameter	Conductor	Shield	Jacket	Length
Outdoor-Cat6-UTP-BC0.51	Cat6 UTP Outdoor Cable	0.51mm	BC	UTP	PE	1000Ft / 305Meter
Outdoor-Cat6-UTP-BC0.57	Cat6 UTP Outdoor Cable	0.57mm	BC	UTP	PE	1000Ft / 305Meter
Outdoor-Cat6-UTP-CCA0.51	Cat6 UTP Outdoor Cable	0.51mm	CCA	UTP	PE	1000Ft / 305Meter
Outdoor-Cat6-UTP-CCA0.57	Cat6 UTP Outdoor Cable	0.57mm	CCA	UTP	PE	1000Ft / 305Meter

CONTENTS

01

Electrical Cable

02

Ethernet LAN Cable

03

Fiber Optic Cable

04

Coaxial Cable

05

Speaker Cable

06

Structured Cabling Components

GYTY53 Armored Fiber Optic Cable

GYTY53 Armored Outdoor Single Mode Optical Fiber Cable

Product Overview:



Key attributes:

Type	Fiber Optic Cable	Cable Structure	uni-Loose tube gel-filled
Number of Conductors	≥ 10	Strength member	Steel Wire or FRP
Conductor Type	Stranded	Color	Black
Certification	ISO9001/ISO14001/CCC	Installation tensile	1000N
Length	3200Ft / 1000Meter	Material of Jacket	PE
Fiber count	4-96 Cores		

Packaging and delivery:

Packaging Details	1000M/ 3200Ft	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	1.05 X 0.9 m
Single gross weight	80.000 KG		

Lead time:

Quantity (rolls) 1-3000	12 days	Quantity (rolls) >3000	To be negotiated
Selling Units	Single item	Place of Origin	1.05 X 0.9 m

OEM & ODM Solutions Tailored :

Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Fiber count	Wire Diameter (mm)	Loose tube Diameter (mm)	Standard thickness of jacket (mm)	Fiber Optic Diameter (mm)	Fiber Optic Weight (kg/km)	Installation tensile Long term / short-term (N)	Installation tensile (N/100mm)
4-30	1.5	/	1.5/2.1	11.8	600-1500	138	1000
32-36	2.25	/	1.5/2.1	13.0	1000/3000	170	1000
38-48	2.25	3.7	1.5/2.1	14.0	1000/3000	200	1000
50-72	2.25	2.8	2.0/2.6	14.0	1000/3000	200	1000
74-84	2.25	4.5	2.0/2.6	15.6	1000/3000	245	1000
86-96	2.25	4.5	2.0/2.6	15.6	1000/3000	245	1000

Optical Fiber Patch Cord Cable

Optical Fiber Patch Cord Cable,Single-Mode,Multi-Mode,simplex and duplex pigtails

Product Overview:



Key attributes:

Type	Fiber Optic Jumpers	Connector	SC / LC / FC / ST / MTP / MOP
Model	Single-Mode/Multi-Mode	Place of Origin	GuangZhou, China
Certification	ISO9001 / FCC / ROHS / CE	Color	Yellow / Blue / Orange
Cable Diameter	2.0mm / 3.0mm	Operating Temperature	-40~+85
Wavelength	850 / 1300nm	Jacket Materia	PVC
Length	1,2,3m...Customized		

Packaging and delivery:

Packaging Details	1pcs per bag	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	25 X 3 X 2 cm
Single gross weight	0.100 KG		

Lead time:

Quantity (rolls) 1-40000	1 days	Quantity (rolls) >40000	To be negotiated
Selling Units	Single item		

OEM & ODM Solutions Tailored :

Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Type	Diameter(mm)	Repeatability (dB)	Interchangeability (dB)	Color
Single-Mode Simplex 9/125	0.9/2.0/3.0	≤0.10	≤0.20	Yellow
Single-Mode Duplex Pigtails 9/125	0.9/2.0/3.0			Yellow
Multi-Mode Simplex 50/125	0.9/2.0/3.0			Orange
Multi-Mode Duplex Pigtails 50/125	0.9/2.0/3.0			Orange
Multi-Mode Simplex 50/125 MO3	0.9/2.0/3.0			Blue
Multi-Mode Duplex Pigtails 50/125 MO3	0.9/2.0/3.0			Blue

Fiber Optic Patch Panel

19 Inch Fiber Optic Patch Panel SC/LC/FC/ST Single/Multi-Mode Simplex,Duplex

Product Overview:



Key attributes:

Type	Fiber Optic Patch Panel	Insulation Material	Cold Rolled Plate
Fiber Count	Simplex / Duplex	Thickness	1.5mm
Connector Type	Single/Multi-Mode	Color	White
Ports	12-144 Ports	Operating Temperature	-40°C~85°C

Packaging and delivery:

Packaging Details	/	Port of dispatch	GuangZhou
Single gross weight	4.2 KG	Place of Origin	50 X 32 X 5 cm

Lead time:

Quantity (Pieces) 1-100	12 days	Quantity (Pieces) > 100	To be negotiated
Selling Units	Single item	Place of Origin	50 X 32 X 5 cm

OEM & ODM Solutions Tailored :

Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Type	Specification	Size	Weight(KG)	Color
WD-1901	12 cores	482×310×30	3.7	White
WD-1903	24 cores	482×310×30	5	White
WD-1905	26 cores	482×310×60	6.5	White
WD-1907	48 cores	482×310×60	7	White
WD-1909	72 cores	482×310×90	7.5	White
WD-1911	96 cores	482×310×90	8	White

CONTENTS

01

Electrical Cable

02

Ethernet LAN Cable

03

Fiber Optic Cable

04

Coaxial Cable

05

Speaker Cable


06

Structured Cabling Components

RG6 SYV75Ω Tinned Copper Coaxial Cable

Tinned Copper Conductor CCTV Cable Coaxial Cable Rg6 For Tv Satellite

Product Overview:

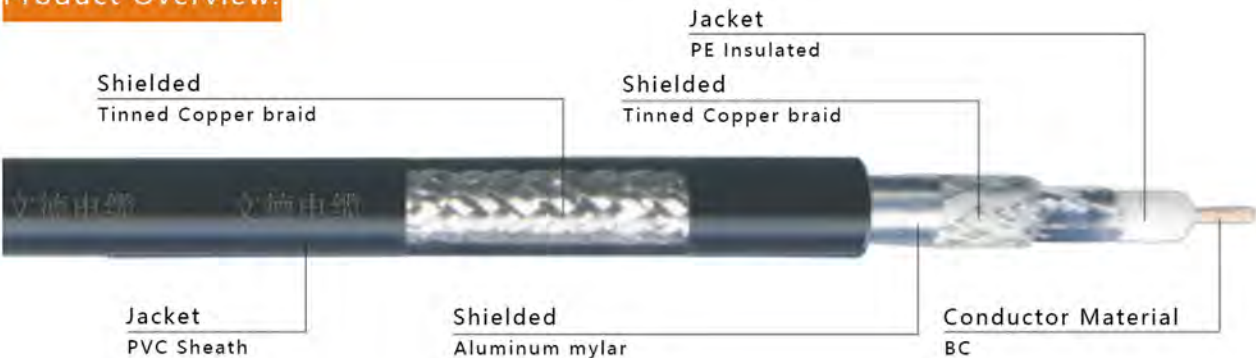

Key attributes:

Type	Coaxial Cable	Insulation Material	PE Insulation Cable
Braiding	64 / 96 / 128	Foil	Bonded Al Foil
Conductor Type	Stranded	Color	Black
Certification	ISO9001/ISO14001/CCC	Conductor	Tinned Copper

Packaging and delivery:

Packaging Details	305M/ 1000Ft	Port of dispatch	GuangZhou
Single gross weight	25.000 KG	Place of Origin	50 X 40 X 20 cm

Lead time:

Quantity (rolls) 1-100	12 days	Quantity (rolls) >100	To be negotiated
Selling Units	Single item	Place of Origin	50 X 40 X 20 cm

OEM & ODM Solutions Tailored :

Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Type/Specifiation	Stuctor of conductor NO./mm	绝缘外径 (mm) Diameter of insulation	Biaian Screening		Diameter of sheath
			Nets of braid	Referentia value oldensity	
SYWV 75-5	1/1.0	4.6±0.2	64	40%	7.0±0.3
			96	60%	7.0±0.3
			128	70%	7.0±0.3
			144	78%	7.0±0.3
SYWV 75-7	1/1.6	6.7±0.2	96	45%	9.2±0.3
			128	55%	9.2±0.3
			144	60%	9.2±0.3
			176	70%	9.2±0.3
SYWV 75-9	1/2.05	8.6±0.2	80	30%	11±0.3
			96	40%	11±0.3
			128	50%	11±0.3
			144	60%	11±0.3
SYWV 75-12	1/2.77	10.2±0.2	112	30%	13.2±0.3
			128	40%	13.2±0.3
			144	50%	13.2±0.3
			176	60%	13.2±0.3

CONTENTS

01

Electrical Cable

02

Ethernet LAN Cable

03

Fiber Optic Cable

04

Coaxial Cable

05

Speaker Cable


06

Structured Cabling Components

RVH Insulation Audio Speaker Cable

PVC Insulation Electrical Audio Speaker Cable

Product Overview:

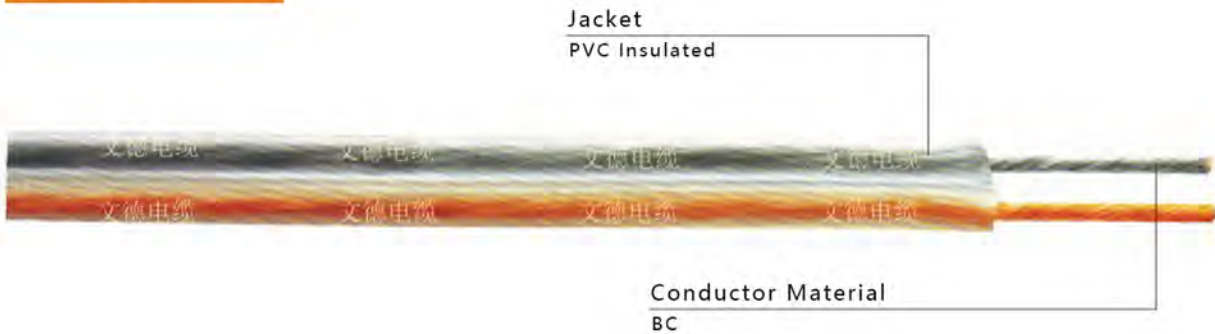

Key attributes:

Type	Speaker Cable	Insulation Material	PVC Insulation
Rated voltage	300V	Twisting method	Double-stranded
Conductor Type	Stranded	Color	Transparent
Certification	ISO9001/ISO14001/CCC	Conductor	Copper

Packaging and delivery:

Packaging Details	100M/ 320Ft	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	20 X 30 X 20 cm
Single gross weight	15.000 KG		

Lead time:

Quantity (rolls) 1-100	20 days	Quantity (rolls) > 100	To be negotiated
Selling Units	Single item	Place of Origin	20 X 30 X 20 cm

OEM & ODM Solutions Tailored :

Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Type/Specifiation	Overall diameter		Maximum electcrical resistance at 20°C MΩ/Km		Minimum insulation resistance at 70°C MΩ/Km
	Lower limit	Upper limit	Copper	Tinmed Copper	
RVB2X50/0.10	2.5-5.2	3.5-6.5	48.0	50	0.13
RVB2X100/0.10	3.0-6.2	4.2-7.5	24.3	25.4	0.011
RVB2X150/0.10	3.3-6.8	4.5-8.2	16.6	17.3	0.010
RVB2X200/0.10	3.7-7.6	5.0-9.4	12.7	13.2	0.010
RVB2X300/0.10	4.3-8.8	5.7-11.0	8.8	9.1	0.009
RVB2X500/0.10	5.7-11.6	7.0-14.0	4.95	5.09	0.006

CONTENTS

01

Electrical Cable

02

Ethernet LAN Cable

03

Fiber Optic Cable

04

Coaxial Cable

05

Speaker Cable

06

Structured Cabling Components

RJ45 Keystone Jacks

Cat5e Cat6 Cat6a RJ45 Keystone Jacks 90 Degree

Product Overview:



Key attributes:

Type	Cat 5e / Cat6 / Cat6a	Angle	90 Degree
Contact Material	Brass	Place of Origin	GuangZhou, China
Wiring Scheme	T568A/T568B	Color	White
Pins	8P8C	Material	Plastic
Dust Cover	With Dust Cover	Support Network	Ethernet
Shielding type	Shielded / Unshielded		

Packaging and delivery:

Packaging Details	1 Pcs /Bag	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	6 X 9 X 2 cm
Single gross weight	0.03 KG		

Lead time:

Quantity (rolls) 1 -5000	20 days	Quantity (rolls) >5000	To be negotiated
Selling Units	Single item		

OEM & ODM Solutions Tailored :

Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Model Number	Type	Angle	Shielding type	Color
Keystone Jacks-Cat5e	Cat5e Keystone Jacks	90 Degree	Shielded / Unshielded	White
Keystone Jacks-Cat6	Cat6 Keystone Jacks	90 Degree	Shielded / Unshielded	White
Keystone Jacks-Cat6A	Cat6a Keystone Jacks	90 Degree	Shielded / Unshielded	White
Keystone Jacks-Cat7	Cat7 Keystone Jacks	90 Degree	Shielded / Unshielded	White

Network Face Plate Ethernet Cable Wall Plate

Cat 5e/Cat6 UTP/FTP RJ45/RJ11 Network Face Plate Keystone Wall Plate

Product Overview:



Key attributes:

Type	Cat 5e/Cat6	Connector	RJ45 / RJ11
specifications	86mm*86mm	Place of Origin	GuangZhou, China
Certification	ISO9001 / FCC / ROHS / CE	Color	White
Specifications	86mm*86mm	Material	ABS/PC
Operation Temperature	-20° C to +70 °C	Label	Support printing
Port	From single port to multiple ports		

Packaging and delivery:

Packaging Details	1Pcs bag,1000Pcs/Carton	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	8.6 X 8.6 X 1 cm
Single gross weight	0.038 KG		

Lead time:

Quantity (rolls) 1-10000	20 days	Quantity (rolls) >10000	To be negotiated
Selling Units	Single item		

OEM & ODM Solutions Tailored :

Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Model Number	Type	Port	Specifications	Color
Wall Plate-Cat5e	Cat5e Wall Plate	1Port/2Port/3Port/4Port	86mm*86mm	White
Wall Plate-Cat6	Cat6 Wall Plate	1Port/2Port/3Port/4Port	86mm*86mm	White
Wall Plate-Cat6A	Cat6a Wall Plate	1Port/2Port/3Port/4Port	86mm*86mm	White
Wall Plate-Cat7	Cat7 Wall Plate	1Port/2Port/3Port/4Port	86mm*86mm	White

Cat5e/Cat6 Patch Cord Rj45 Ethernet Cable

Cat5e/Cat6/Cat7 UTP RJ45 0.5-90m Patch Cord Rj45 Ethernet Cable

Product Overview:



Key attributes:

Type	Cat 5e/Cat6/Cat6A/Cat7	Connector	RJ45
Number of Conductors	8	Place of Origin	GuangZhou, China
Certification	ISO9001 / FCC / ROHS / CE	Color	9 colors available
Conductor Type	Stranded	Conductor Material	BC / CCA
Shielding type	UTP/ FTP	Jacket Materia	LSZH / PE
Length	0.5m/1m/2m/5m/Customized		

Packaging and delivery:

Packaging Details	1pcs per bag	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	25 X 3 X 2 cm
Single gross weight	0.100 KG		

Lead time:

Quantity (rolls) 1-40000	1 days	Quantity (rolls) >40000	To be negotiated
Selling Units	Single item		

OEM & ODM Solutions Tailored :

Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Model Number	Type	Port	Shield	Color
Patch Cord-Cat5e-UTP	Cat5e UTP Patch Cord	0.5m/1m/2m/5m/Customized	UTP	9 colors available
Patch Cord-Cat5e-FTP	Cat5e FTP Patch Cord	0.5m/1m/2m/5m/Customized	FTP	9 colors available
Patch Cord-Cat6-UTP	Cat6 UTP Patch Cord	0.5m/1m/2m/5m/Customized	UTP	9 colors available
Patch Cord-Cat6-FTP	Cat6 FTP Patch Cord	0.5m/1m/2m/5m/Customized	FTP	9 colors available

24-Port Cat5e/Cat6 Network Patch Panel

19 Inch 1U Rack Mount RJ45 Cat5e/Cat6 UTP FTP 24 Ports Network Patch Panel

Product Overview:



Key attributes:

Type	Cat 5e/Cat6	Material	Cold Rolled Steel
Connector Port	RJ45 socket	Place of Origin	GuangZhou, China
Certification	ISO9001 / FCC / ROHS / CE	Color	Black
Height	1U	Plastic Part	Environmental protection PC
Size	19 Inches	Number of insertions	≥750
Shielding type	UTP/ FTP		

Packaging and delivery:

Packaging Details	1pc/ box , 10 PCS/CTN	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	53 X 26 X 35 cm
Single gross weight	0.600 KG		

Lead time:

Quantity (rolls) 1-3000	12 days	Quantity (rolls) >3000	To be negotiated
Selling Units	Single item		

OEM & ODM Solutions Tailored :

Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Model Number	Type	Port	Shield	Color
Patch Panel-Cat5e-UTP	Cat5e UTP Patch Panel	24-Port/48-Port	UTP	Black
Patch Panel-Cat5e-FTP	Cat5e FTP Patch Panel	24-Port/48-Port	FTP	Black
Patch Panel-Cat6-UTP	Cat6 UTP Patch Panel	24-Port/48-Port	UTP	Black
Patch Panel-Cat6-FTP	Cat6 FTP Patch Panel	24-Port/48-Port	FTP	Black

19 Inches 1U Network Cabinet Cable

Rack Mounted Cable Management Metal 19 Inches 1U 2U Network Cabinet Cable

Product Overview:



Key attributes:

Type	Cable Management	Thickness	1.2mm
Installation	Rack Mount	Place of Origin	GuangZhou, China
Height	1U	Color	Black
Size	19 Inches	Material	Alloy Steel
Application	Networking	NO. of Slot	12 Slots
Direction	Horizontal		

Packaging and delivery:

Packaging Details	1 Pcs /Bag	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	49.5 X 6 X 5 cm
Single gross weight	0.45 KG		

Lead time:

Quantity (rolls) 1-5000	20 days	Quantity (rolls) >5000	To be negotiated
Selling Units	Single item		

OEM & ODM Solutions Tailored :

Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Model Number	Type	NO. of Slot	Height	Color
Cable Management	Cable Management	12 Slots	1U	Black
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

RJ45 Modular Plugs

Cat5e Cat6 Cat6a Connectors RJ45 Transparent Modular Plugs

Product Overview:



Key attributes:

Type	Cat 5e / Cat6 / Cat6a	Connector Type	RJ45
Contact Material	Brass	Place of Origin	GuangZhou, China
Number of Ports	1	Color	Transparent
Pins	8	Material	Plastic
Number of Cores	8-core	Support Network	Ethernet
Shielding type	Shielded / Unshielded		

Packaging and delivery:

Packaging Details	100 Pcs /Bag	Port of dispatch	GuangZhou
Selling Units	Single item	Place of Origin	22.4 X 11.68 X 8mm
Single gross weight	0.003 KG		

Lead time:

Quantity (rolls) 1-10000	20 days	Quantity (rolls) >10000	To be negotiated
Selling Units	Single item		

OEM & ODM Solutions Tailored :

Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Model Number	Type	Contact Material	Shielding type	Color
Modular Plugs-Cat5e	Cat5e Modular Plugs	Brass	Shielded / Unshielded	Transparent
Modular Plugs-Cat6	Cat6 Modular Plugs	Brass	Shielded / Unshielded	Transparent
Modular Plugs-Cat6A	Cat6a Modular Plugs	Brass	Shielded / Unshielded	Transparent
Modular Plugs-Cat7	Cat7 Modular Plugs	Brass	Shielded / Unshielded	Transparent

Fiber Optic Adapters

Fiber Optic Adapters SC/LC/FC/ST/MTP/MOP Single/Multi-Mode Simplex,Duplex



Key attributes:

Type	Fiber Optic Adapter	Insulation Material	LSZH
Fiber Count	Simplex / Duplex	Tensile Strength	60/100N
Connector Type	Single/Multi-Mode	Color	Blue / Yellow / Red
Durability	500 Cycles	Operating Temperature	-40°C~85°C

Packaging and delivery:

Packaging Details	/	Port of dispatch	GuangZhou
Single gross weight	0.01 KG	Place of Origin	44 X 17 X 10 mm

Lead time:

Quantity (rolls) 1-100	12 days	Quantity (rolls) >100	To be negotiated
Selling Units	Single item	Place of Origin	44 X 17 X 10 mm

OEM & ODM Solutions Tailored :

Our company specializes in providing flexible OEM and ODM services to meet your unique product requirements.

Type	Insert loss (dB)	Return loss (dB)	Repeatability (dB)	Interchangeability (dB)
LC	≤0.20	PC≥45dB, UPC≥50dB, APC≥60dB	≤0.10	≤0.20
FC				
SC				
ST				